
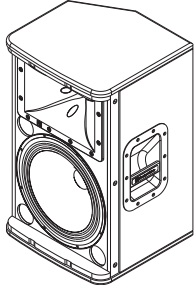
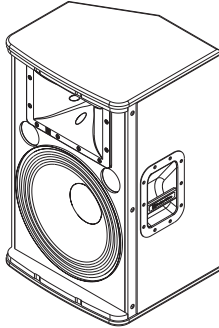
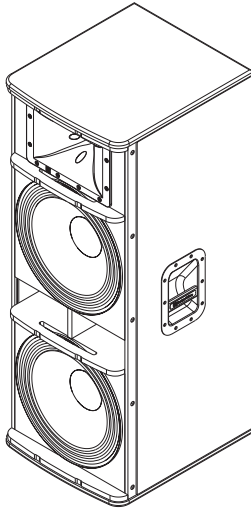


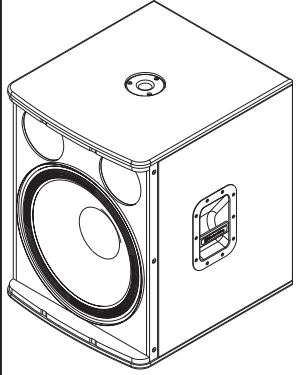

Specifications

| Model (Part Number) | ELX 112 (F01U170823) | ELX 115 (F01U170824) | ELX 215 (F01U170826) | ELX 118 (F01U170825) |
|----------------------------------|---|---|--|---|
| |  |  |  |  |
| Freq. Response (-3 dB): | 82 Hz - 18 kHz ¹ | 75 Hz - 18 kHz ¹ | 62 Hz - 18 kHz ¹ | 50 Hz - 100 Hz ² |
| Freq. Range (-10 dB): | 55 Hz - 20 kHz ¹ | 50 Hz - 20 kHz ¹ | 38 Hz - 20 kHz ¹ | 35 Hz - 200 Hz ² |
| Axial Sensitivity: | 94 dB | 95 dB | 96 dB | 96 dB |
| Max. Measured SPL ³ : | 132 dB | 134 dB | 137 dB | 134 dB |
| Recommended HP Freq.: | 45 Hz | 40 Hz | 35 Hz | 30 Hz |
| Coverage (Horiz. x Vert.): | 90° x 50° | | | Omnidirectional |
| Power Handling: | 250W Continuous, 1000W Peak | 400W Continuous, 1600W Peak | 600W Continuous, 2400W Peak | 400W Continuous, 1600W Peak |
| LF Transducer(s): | (1) EVS-12K, 305mm (12") Woofer | (1) EVS-15K, 381mm (15") Woofer | (2) EVS-15K, 381mm (15") Woofers | (1) EVS-18K, 457mm (18") Woofer |
| HF Transducer: | DH-1K, 39mm (1.5") Titanium Diaphragm Compression Driver | | | N/A |
| Crossover Frequency: | 2.1 kHz | 1.7 kHz | | N/A |
| Nominal Impedance: | 8 Ohms | | 4 Ohms | 8 Ohms |
| Minimum Impedance: | 7.0 Ohms | 7.4 Ohms | 3.7 Ohms | 6.7 Ohms |
| Connectors: | Dual NL4 | | | |
| Enclosure Material: | 9-ply, 15mm Plywood, Internally Braced, with Textured Paint | | | |
| Grille: | 18GA Steel with Black Powdercoat | | | |
| Dimensions (H x W x D): | 607mm x 362mm x 340mm (23.89" x 14.25" x 13.41") | 708mm x 432mm x 382mm (27.89" x 17.02" x 15.05") | 1154mm x 432mm x 501mm (45.44" x 17.02" x 19.73") | 661mm x 507mm x 574mm (26.02" x 19.98" x 22.60") |
| Net Weight: | 16.0 kg (35.2 lbs) | 21.9 kg (48.2 lbs) | 40.7 kg (89.6 lbs) | 30.6 kg (67.4 lbs) |
| Shipping Weight: | 19.9 kg (43.8 lbs) | 26.6 kg (58.6 lbs) | 48.4 kg (106.6 lbs) | 37.2 kg (81.9 lbs) |
| Accessories: | TSS-1, Aluminum Tripod Stand TSP-1, Tripod Kit, Includes (2) Tripod Stands and Carrying Case ASP-1, Steel Subwoofer Stand | | N/A | ASP-1, Steel Subwoofer Stand |

¹ Full Space Measurement

² Half Space Measurement

³ Max SPL is measured at 1m using broadband pink noise at rated peak power rating.